

The Adventure is Always Better...


You shouldn't have to sacrifice the comforts of home because you're on the road-- especially hot water. Keep your water heater out of sight and out of mind -- take advantage of Suburban's 30+ years of expertise and reliability with longer lasting residential style tank water heaters.

Available in five different capacities, you can choose the tank that best fits your RV and your lifestyle. The porcelain lined, steel tank and the replaceable anode rod work in together to prevent corrosion therefore lengthening the life of your RV water heater.



... when it Feels Like Home!

- Durable porcelain lined steel tank - built just like longer lasting residential tank water heaters
- Sacrificial, replaceable anode rod protects against tank corrosion and doubles as a drain
- Optional electric element allows you to take advantage of campsite or generator power
- Use gas and electric element simultaneously for a faster recovery rate
- Repositionable module board provides installation flexibility
- Direct Spark Ignition (DSI) that directly lights the main burner, avoiding the need for a pilot
- 2 year limited warranty with the tank itself backed by a 3 year tank limited warranty

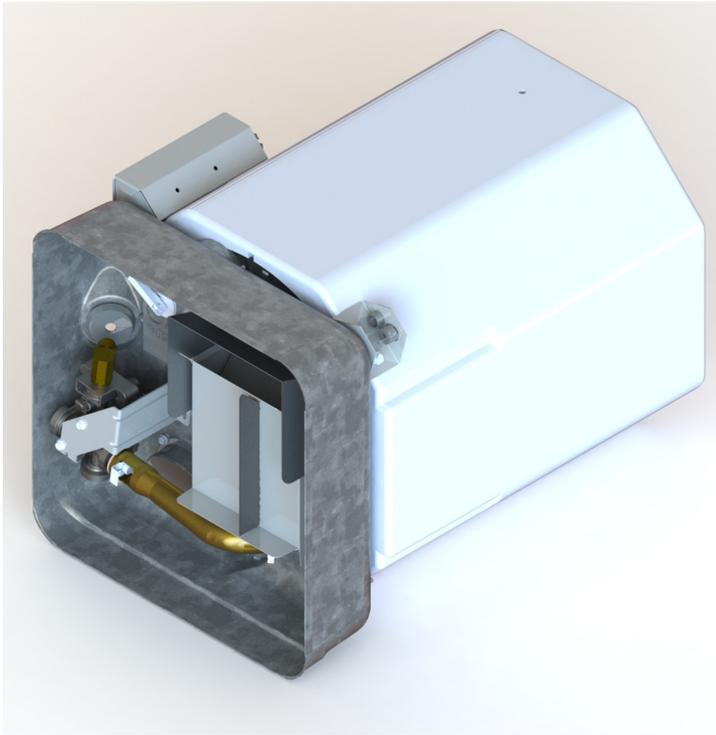

INSTALLATION/OPERATION COMPONENTS

DOORS

Radius Corner



Colonial White

Flush Mount



Polar White

Most Doors are available in Colonial White, Polar White and Black.
Custom colors available upon request.

ON/OFF SWITCH & LIGHT

for D, DE and DEC MODELS



Inside mounted switch for convenient control of water heater gas ignition.

for DEL and DELC MODELS



Inside mounted switch for convenient control of water heater gas ignition AND powers the electric element circuit

ON/OFF Switch & Light Plates are available in White and Black.

AVAILABLE UNITS

| MODEL | PRODUCT DESCRIPTION | CAPACITY (GALLONS) | | | | |
|-------------|--|--------------------|---|----|----|----|
| | | 4 | 6 | 10 | 12 | 16 |
| D | Direct Spark Ignition | X | X | X | X | X |
| DE | Direct Spark Ignition with 1440 Watt Electric Element | X | X | X | X | X |
| DEL | Direct Spark Ignition with 1440 Watt Electric Element and 12VDC Relay | | X | X | X | X |
| DEC | Direct Spark Ignition with 1440 Watt Electric Element and 120VAC Power Cord | | X | X | X | X |
| DELC | Direct Spark Ignition with 1440 Watt Electric Element, 12VDC Relay and 120VAC Power Cord | | X | X | X | X |

TECHNICAL SPECIFICATIONS

| | 4-Gallon | 6-Gallon | 10-Gallon | 12-Gallon | 16-Gallon |
|---|---------------------------|--|---|--|---|
|   MODELS (SKUS) SW4D (5135A) SW4DE (5136A) | | SW6D (5138A/E) SW6DE (5139A/E) SW6DEL (5140A/E) SW6DEC (5223A/E) SW6DELC (5224A/E) | SW10D (5142A/F) SW10DE (5143A/F) SW10DEL (5144A/F) SW10DEC (5228A/F) SW10DELC (5230A/F) | SW12D (5146A/F) SW12DE (5147A/F) SW12DEL (5148A/F) SW12DEC (5229A/F) SW12DELC (5231 A/F) | SW16D (5150A) SW16DE (5151A) SW16DEL (5152A) SW16DEC (5232A) SW16DELC (5233A) |
| GAS INPUT (BTU/H) | 9,000 | 12,000 | 12,000 | 12,000 | 12,000 |
| RECOVERY RATE GAS AND ELECTRIC (GPH) | 13.6 | 16.2 | 16.2 | 16.2 | 16.2 |
| GAS ONLY | 7.6 | 10.1 | 10.1 | 10.1 | 10.1 |
| ELECTRIC ELEMENT ONLY | 6.1 | 6.1 | 6.1 | 6.1 | 6.1 |
| UNIT DIMENSIONS (H X W X D) | 12.69" X 12.69" X 16.125" | 12.69" X 12.69" X 19.19" | 16.22" X 16.22" X 20.50" | 16.22" X 16.22" X 22.25" | 16.22" X 16.22" X 27.00" |
| CUTOUT DIMENSIONS (H X W X D) | 12.75" X 12.75" X 16.125" | 12.75" X 12.75" X 19.19" | 16.38" X 16.38" X 20.50" | 16.38" X 16.38" X 22.25" | 16.38" X 16.38" X 27.00" |
| AVAILABLE DOOR TYPES | Radius Corner, Flush | Radius Corner, Flush | Flush | Flush | Flush |
| PACKAGING | Single-Pack (A) Only | Single-Pack (A) Only Bulk 5/Per (E) | Single-Pack (A) Only Bulk 6/Per (F) | Single-Pack (A) Only Bulk 6/Per (F) | Single-Pack (A) Only |